



## ALUMINUM Post BASE

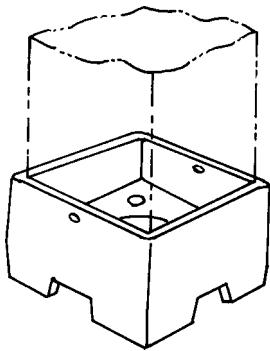

### Attractive Cast Aluminum

Rugged Appearance • Weather Resistant


**AL44\*** for 4 x 4 post      **AL66\*** for 6 x 6 post



Heavy cast aluminum post base. May be secured to concrete with 1/2" anchor bolt, dowel or other type of fastener. Secure post to base with wood screws or nails. The center recess accommodates the fastener head or nut and washer. Weep holes provide drainage and air circulation. Sand blasted finish requires no paint. Dimensioned for 3-1/2" x 3-1/2" or 5-1/2" x 5-1/2" net size posts.

MATERIAL: Aluminum FINISH: Plain **AL 44 & AL66 are not to be used with treated lumber.**

## ECONOMY Post BASE

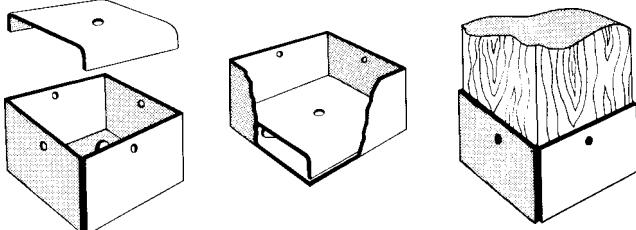



**Post Base** for porches and car ports. Secure base to masonry with 1/2" anchor bolts and to post with screws or nails. Insert separates post from masonry, provides drainage. Slotted hole in base permits lateral positioning. Dimensioned for 3-1/2" x 3-1/2" or 5-1/2" x 5-1/2" net size posts.

MATERIAL: 16 ga. (Base) 14 ga. (Insert) FINISH: Galvanized G60.


Number	Post Size	Per Carton	Wt. Per Carton
ST44	4 x 4	12	13 lbs.
ST66	6 x 6	12	33 lbs.

Supplied in full cartons only.

## ELEVATED Post BASE

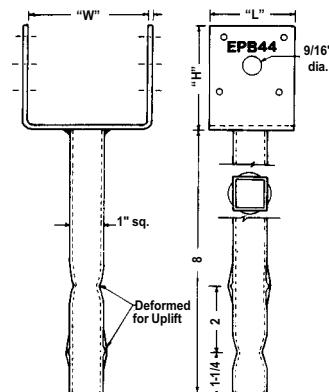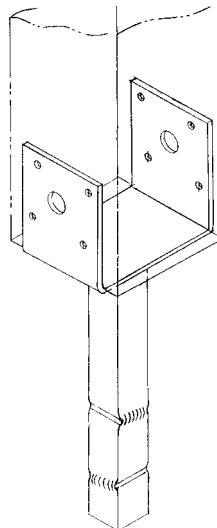

## Post CAP

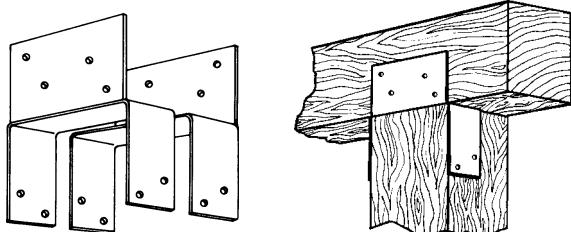

**Post Cap** for porches, car ports and other columns. Secure with nails or screws to join post and beam without toenailing or splitting. May be used in pairs for extra strong connections.

MATERIAL: 16 ga. FINISH: Galvanized G60.

Number	Post Size	Per Carton	Wt. Per Carton
PC-44	4 x 4	12	6 lbs.
PC-66	6 x 6	12	12 lbs.

Supplied in full cartons only.

## NEW STYLING-SQUARE POST

### BLACK COPOLYMER FINISH

### IDEAL FOR PORCH, DECK, CARPORT




**EPB Elevated Post Bases** provide anchorage for wind uplift, lateral and gravity loads. Elevated posts prevent wood rot and permit easy cleaning.

**Installation:** Set in wet concrete after screeding. Limit post seat to less than 3" above concrete. Square post will not rotate or withdraw.

MATERIAL: 11 ga. FINISH: Black copolymer paint.

Part No.	Post Size	W	L	H	Square Tube	Nails
EPB 34	Dbl. 2 x 4	3-1/8	2-1/2	3-1/4	1" x 14 ga.	(8) 16d
EPB 44	4 x 4	3-9/16	2-1/2	3-1/16	1" x 14 ga.	(8) 16d
EPB 46	4 x 6	5-9/16	2-1/2	3-1/8	1" x 14 ga.	(8) 16d
EPB 66	6 x 6	5-9/16	4-1/2	3-1/8	1-1/2" x 14 ga.	(12) 16d

## ANGLE STIFFENERS

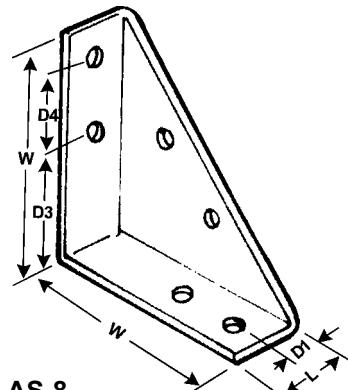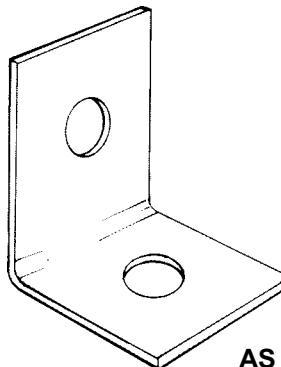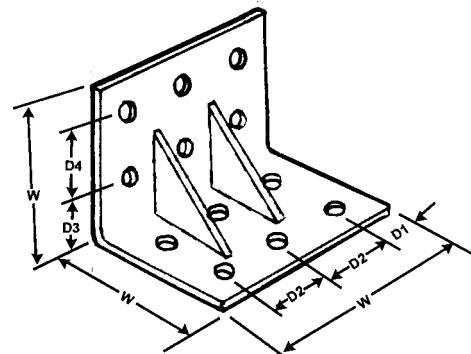AS-8  
AS-9AS 33, 35  
AS 33S, AS 35S  
with gussetAS 55, AS 57,  
AS 55S, AS 57S  
with gusset


**Angle Stiffeners** improve the rigidity of any 90° wood connection. They develop the full allowable capability of bolts. Angle stiffeners also function as heavy-duty truss tie-downs. Because of the wide range of allowable loads for bolts when loaded parallel and perpendicular to grain, and at intermediate angles, load values are not listed. These can be obtained from National Design Specification for Wood Construction, published by American Forest and Paper Association.

MATERIAL: 7 ga. and 3 ga. ASTM A36. FINISH: Black copolymer paint.

Part Number	Gauge	Dimensions						Strut Plates
		W	L	D1	D2	D3	D4	
AS-8	7	8-1/8	2-11/16	1-11/32	—	4-3/8	2 1/2	(4) 5/8
AS-9	3	9-5/16	3	1-1/2	—	4-13/16	3	(4) 3/4
AS-33	7	3-1/4	2-1/2	1-1/4	—	2	—	(2) 5/8
AS-35	7	3-1/4	5	1-1/4	2-1/2	2	—	(4) 5/8
AS-35S	7	3-1/4	5	1-1/4	2-1/2	2	—	(4) 5/8
AS-37	7	3-1/4	7-1/2	1-1/4	2-1/2	2	—	(6) 5/8
AS-37S	7	3-1/4	7-1/2	1-1/4	2-1/2	2	—	(6) 5/8
AS-43	3	4-1/4	3	1-1/2	—	2-3/4	—	(2) 3/4
AS-46	3	4-1/4	6	1-1/2	3	2-3/4	—	(4) 3/4
AS-46S	3	4-1/4	6	1-1/2	3	2-3/4	—	(4) 3/4
AS-48	3	4-1/4	9	1-1/2	3	2-3/4	—	(6) 3/4
AS-49S	3	4-1/4	9	1-1/2	3	2-3/4	—	(6) 3/4
AS-53	3	5-3/4	2-1/2	1-1/4	—	2	2-1/2	(4) 5/8
AS-55	3	5-3/4	5	1-1/4	2-1/2	2	2-1/2	(8) 5/8
AS-55S	3	5-3/4	5	1-1/4	2-1/2	2	2-1/2	(8) 5/8
AS-57	3	5-3/4	7-1/2	1-1/4	2-1/2	2	2-1/2	(12) 5/8
AS-57S	3	5-3/4	7-1/2	1-1/4	2-1/2	2	2-1/2	(12) 5/8
AS-73	3	7-1/4	3	1-1/2	—	3	3	(4) 3/4
AS-76	3	7-1/4	6	1-1/2	3	3	3	(8) 3/4
AS-76S	3	7-1/4	6	1-1/2	3	3	3	(8) 3/4
AS-79	3	7-1/4	9	1-1/2	3	3	3	(12) 3/4
AS-79S	3	7-1/4	9	1-1/2	3	3	3	(12) 3/4
AS-4TS	3	4-1/4	6	1-1/8	3-3/4	3-1/4	—	(2) 3/4*
AS-6TS	3	6-1/4	6	1-1/8	3-3/4	5-1/4	—	(2) 3/4*
AS-14TS	3	13-3/4	6	1-1/8	3-3/4	12-3/4	—	(2) 3/4*

\*Plus (4) 1/2" anchor bolts.


## TEES & ELLS

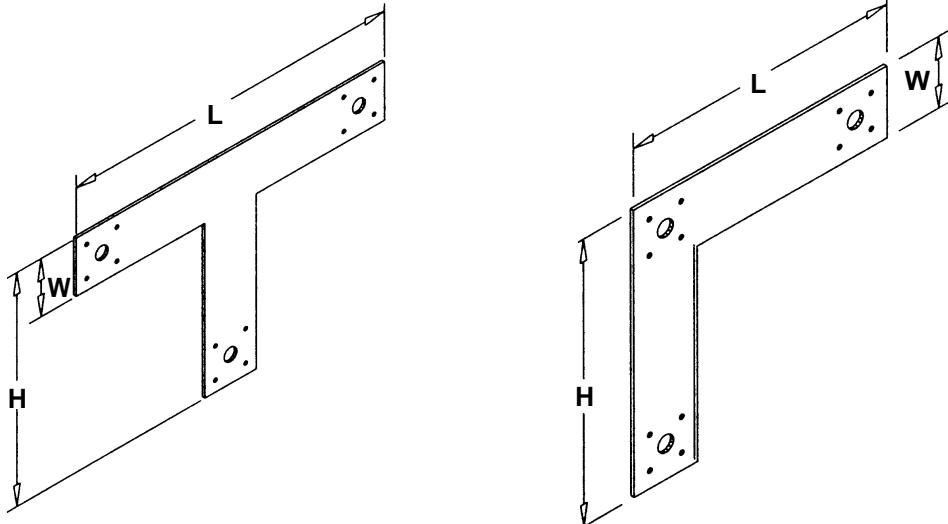

Part Number	Gauge	Dimensions			Fasteners	
		H	L	W	Bolts	Nails
TEE-6	14	5	6	1-1/2	(3) 1/2	(12) 16d
TEE-8	14	8	8-1/2	2	(3) 1/2	(12) 16d
TEE-12	14	8	12	2	(3) 1/2	(12) 16d
TEE-16	14	11	15-3/4	3	(3) 1/2	(12) 16d
TEE-12/12	14	12	12	2	(3) 1/2	(12) 16d
ELL-6	14	6	6	1-1/2	(2) 1/2	(8) 16d
ELL-8	14	8	8	3	(2) 1/2	(8) 16d
ELL-12/12	14	12	12	2	(3) 1/2	(12) 16d

MATERIAL: 14 ga.

FINISH: Galvanized G60

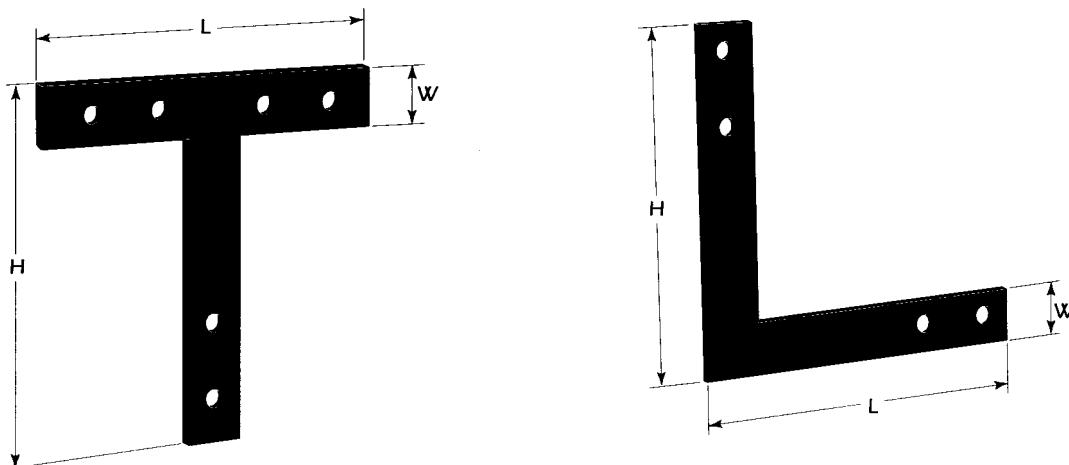

**Note:** Although Tees & Ells provide stiffness to joints, they should not be used as moment-resisting connectors, nor as substitutions for X and K bracing.

MATERIAL: 7 ga.

Part Number	Gauge	Dimensions			Fasteners
		H	L	W	
TEE-12H	7	12	12	2-1/2	(4) 5/8
TEE-16H	7	16	16-1/4	2-1/2	(6) 5/8
ELL-12H	7	12	12	2-1/2	(5) 5/8
ELL-16H	7	16	16	2-1/2	(7) 5/8

FINISH: Black copolymer paint.

OPTION: Hot-dip galvanized, available as a special order.